


RGB Combiner

Specifications

Parameter	Value
Wavelength (nm)	520(green)/660(red), 450(blue)/520(green)/660(red)
Bandwidth(nm)	+/-20
Insertion loss (nm)	≤1.5
Isolation(dB)	≥15
Reflection Isolation(dB)	≥15
Directivity(dB)	≥55
Return loss(dB)	≥50
PDL(dB)	≤0.15
Power handling (mW)	≤500
Fiber	HP460
Operating temperature(°C)	0 ~ +70
Storage temperature(°C)	-40 ~ +85
Dimensions (mm)	100x80x10

Package Dimensions

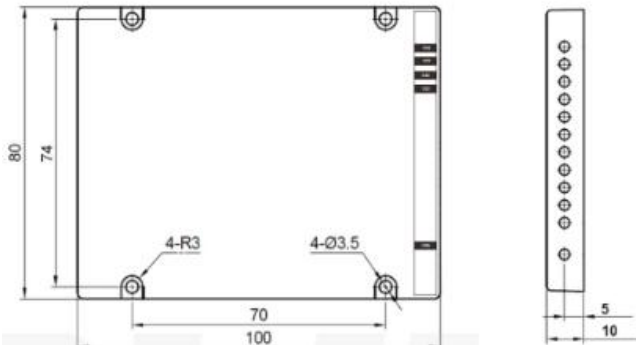

Ordering Information

RG B	Port	Wavelength	Pigtail Type	Fiber Type	Length	Connector	Package	
	1=1 x2 3=1 x3	1=635/532 2=635/532/4 50	1=900um tube	loose	1=HP4 60	0.8=0.8 m X:other	NE=None FC=FC/UPC SC=SC/UPC FA=FC/APC SA=SC/APC ST=ST/UPC LC=LC/UPC xx=Others	80=100*8 0*10